

# หม้อแปลงกระแสไฟฟ้า Current Transformers MSQ Series




## SPECIFICATION


- Reference Standard : IEC 61869-2;GB20840.1;GB20840.2
- Rated primary current : 30A-2500A
- Rated secondary current : 5A
- Accuracy Class : 1
- Highest voltage : 0.66Kv
- Operating frequency : 50/60Hz
- Withstand voltage : 3kV
- Security factor : FS<sub>5</sub>
- Case material : UL flame retardant rating UL94 V-2
- Continuous current : 1.2xIn
- Insulation test : 3kV/1min
- Operating temperature : -25 to + 55 °C
- Storage temperature : -35 to + 70 °C

## MAIN FEATURES :


- ✓ มีความแม่นยำที่ดี (Good accuracy)
- ✓ ราคาข้อมเขาว์ (Economic price)

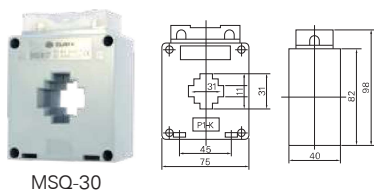


MSQ-30

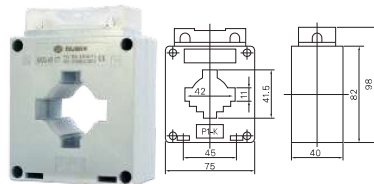


MSQ-40

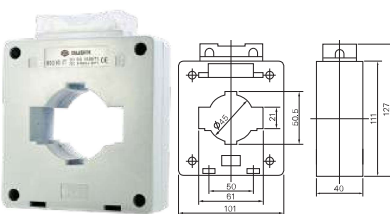

MSQ-60

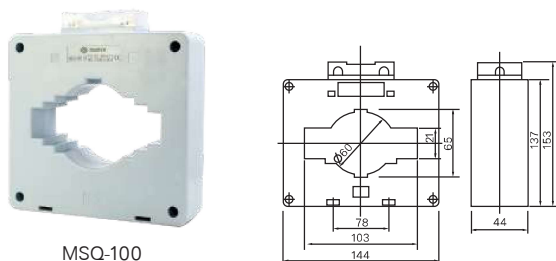

MSQ-100

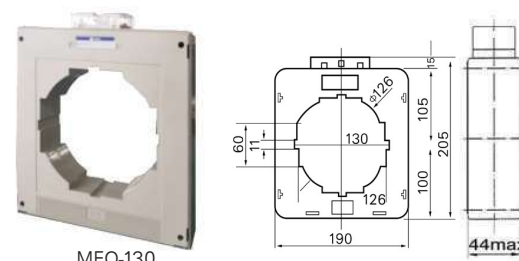

MFO-130

MSQ-Series				Class 1.0		
รุ่น (Model)	ขนาดช่อง (Window)	ค่าเบอร์ตัน (Burden Output)	Current (A)	Through No.(Turns)	จำนวน/ลัง (Pcs/Ctn)	ราคา/ตัว (฿)
			Primary/Secondary			
MSQ-30	30x10 mm.	2.5VA	30/5A	1	60	235.-
			40/5A	1	60	235.-
			50/5A	1	60	235.-
			60/5A	1	60	235.-
			80/5A	1	60	235.-
MSQ-30	30x10 mm.	5VA	80/5A	1	60	245.-
			100/5A	1	60	245.-
			125/5A	1	60	245.-
			150/5A	1	60	245.-
			160/5A	1	60	245.-
MSQ-40	40x10 mm.	5VA	200/5A	1	60	255.-
			250/5A	1	60	255.-
			300/5A	1	60	255.-
			400/5A	1	60	255.-
MSQ-60	60x20 mm.	10VA	400/5A	1	40	400.-
			500/5A	1	40	400.-
			600/5A	1	40	400.-
			800/5A	1	40	420.-
MSQ-100	100x30 mm.	15VA	1000/5A	1	20	565.-
			1500/5A	1	20	675.-
			2000/5A	1	20	840.-
			2500/5A	1	20	1,090.-
MFO-130	130x10 mm.	15VA	5000/5A	1	10	2,530.-

\* ราคาสินค้าไม่รวมภาษีมูลค่าเพิ่มและราคาอาจเปลี่ยนแปลงได้โดยไม่ต้องแจ้งให้ทราบล่วงหน้า \*